


## Boltless Shelving with Steel Shelves

Tennsco's new shelving configuration offers the ease of a boltless design with the appeal of a boxed-formed steel shelf. The steel shelving clip directly to the upright making assembly a cinch.

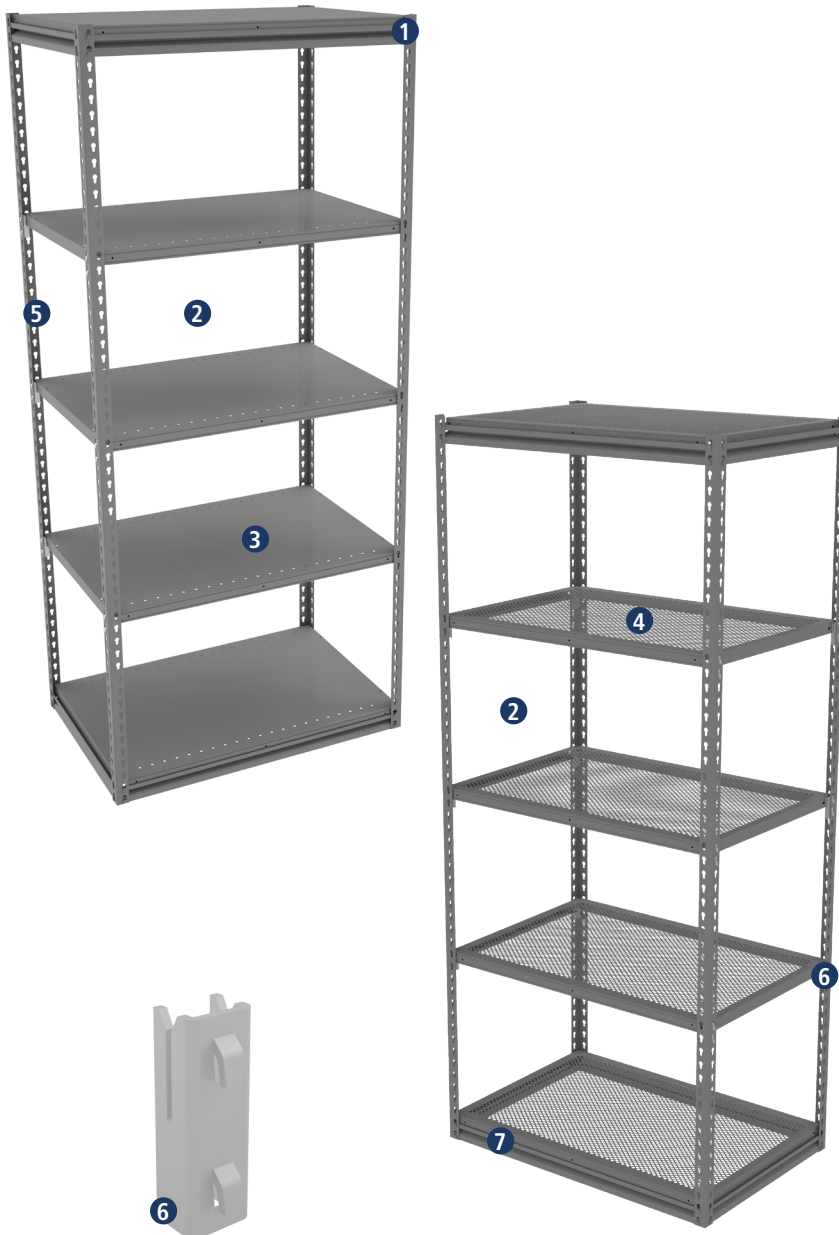

**1. Easy-to-Assemble**

No tools needed. Just clip in the shelves.

**2. Unobstructed Access From All Sides**

No sway braces allows access from all sides.

**3. Solid Steel Shelves (option)**

Provide a durable, strong surface with box formation. Capacities up to 600 lbs.

**4. Perforated Steel Shelves (option)**

Allow greater visibility of contents and airflow. Capacities up to 450 lbs.

**5. Pre-Configured Units**

Available in 84" height with various widths and depths. See back page for product information.


**6. Easy-to-Use Shelf Clips**

Shelves secured by shelf clips, making adjustment a snap; no tools required. Each shelf adjusts in increments of 1 1/2".

**7. Double Rivet Medium Duty Supports**

Provide lateral stability at the top and bottom of each unit.

**Standard Colors**



## SOLID STEEL SHELF UNITS

UNIT SIZE			SHELF LOAD CAPACITY*	STARTER UNITS		ADDER UNITS		EXTRA SHELF LEVEL	
W	D	H		CAT NO.	WT.	CAT NO.	WT.	CAT NO.	WT.
36	12	84	750	ZM7-3612S-5D	61.0	ZM7-3612A-5D	59.0	ZMS-3612	6.7
42	12	84	600	ZM7-4212S-5D	68.0	ZM7-4212A-5D	66.0	ZMS-4212	7.7
48	12	84	500	ZM7-4812S-5D	74.0	ZM7-4812A-5D	72.0	ZMS-4812	8.7
36	18	84	750	ZM7-3618S-5D	73.0	ZM7-3618A-5D	70.0	ZMS-3618	8.8
42	18	84	600	ZM7-4218S-5D	81.0	ZM7-4218A-5D	78.0	ZMS-4218	10.1
48	18	84	500	ZM7-4818S-5D	89.0	ZM7-4818A-5D	86.0	ZMS-4818	11.4
36	24	84	700	ZM7-3624S-5D	85.0	ZM7-3624A-5D	82.0	ZMS-3624	10.9
42	24	84	550	ZM7-4224S-5D	95.0	ZM7-4224A-5D	91.0	ZMS-4224	12.5
48	24	84	450	ZM7-4824S-5D	104.0	ZM7-4824A-5D	100.0	ZMS-4824	14.1
36	36	84	600	ZM7-3636S-5D	122.0	ZM7-3636A-5D	118.0	ZMS-3636	17.9
42	36	84	550	ZM7-4236S-5D	137.0	ZM7-4236A-5D	132.0	ZMS-4236	21.0
48	36	84	450	ZM7-4836S-5D	150.0	ZM7-4836A-5D	146.0	ZMS-4836	23.0

\*Load capacity figures are calculated in pounds per shelf level, evenly distributed. Total unit capacity, using four EUR uprights, not to exceed 8,000 lbs., based on 24" centers or less.

## PERFORATED STEEL SHELF UNITS

UNIT SIZE			SHELF LOAD CAPACITY*	STARTER UNITS		ADDER UNITS		EXTRA SHELF LEVEL	
W	D	H		CAT NO.	WT.	CAT NO.	WT.	CAT NO.	WT.
36	12	84	450	ZM7-3612S-5PD	57.0	ZM7-3612A-5PD	55.0	ZMPS-3612	5.8
48	12	84	300	ZM7-4812S-5PD	68.0	ZM7-4812A-5PD	66.0	ZMPS-4812	7.4
36	18	84	450	ZM7-3618S-5PD	67.0	ZM7-3618A-5PD	64.0	ZMPS-3618	7.5
42	18	84	375	ZM7-4218S-5PD	73.0	ZM7-4218A-5PD	71.0	ZMPS-4218	8.6
48	18	84	300	ZM7-4818S-5PD	80.0	ZM7-4818A-5PD	77.0	ZMPS-4818	9.6
36	24	84	450	ZM7-3624S-5PD	76.0	ZM7-3624A-5PD	73.0	ZMPS-3624	9.2
42	24	84	325	ZM7-4224S-5PD	84.0	ZM7-4224A-5PD	81.0	ZMPS-4224	10.5
48	24	84	250	ZM7-4824S-5PD	92.0	ZM7-4824A-5PD	89.0	ZMPS-4824	11.7
36	36	84	400	ZM7-3636S-5PD	95.0	ZM7-3636A-5PD	90.0	ZMPS-3636	12.4
42	36	84	250	ZM7-4236S-5PD	112.0	ZM7-4236A-5PD	108.0	ZMPS-4236	15.7
48	36	84	175	ZM7-4836S-5PD	116.0	ZM7-4836A-5PD	112.0	ZMPS-4836	16.2

\*Load capacity figures are calculated in pounds per shelf level, evenly distributed. Total unit capacity, using four EUR uprights, not to exceed 8,000 lbs., based on 24" centers or less.

