

Q LINE HINGED DOOR KIT ASSEMBLY Models HD-3637 and HD-3687

Tennsco Corp., Dickson, TN 37056-1888 • (615) 446-8000

RETAIN INSTRUCTIONS FOR FUTURE REFERENCE!


Congratulations on your purchase of a Q Line Hinged Door Kit from **Tennsco**! Tennsco's hinged doors provide added security for your stored items, as well as protection from dust and other environmental hazards.

Available in two heights (38" and 87"), Tennsco's doors are 36"w x 1"d, and constructed of 22 gauge steel. The door frame is constructed of 16 gauge steel. And our attractive and durable powder-coated paint finish will provide for years of service.

Tennsco's lockable handle provides a three-point locking system for maximum security. Our nylon lock bar guides help to ensure quiet operation.

GENERAL SAFETY INFORMATION

Some parts may have sharp edges. CARE must be taken when handling various pieces to avoid injury. For safety, wear a pair of work gloves when assembling or performing any maintenance on doors.

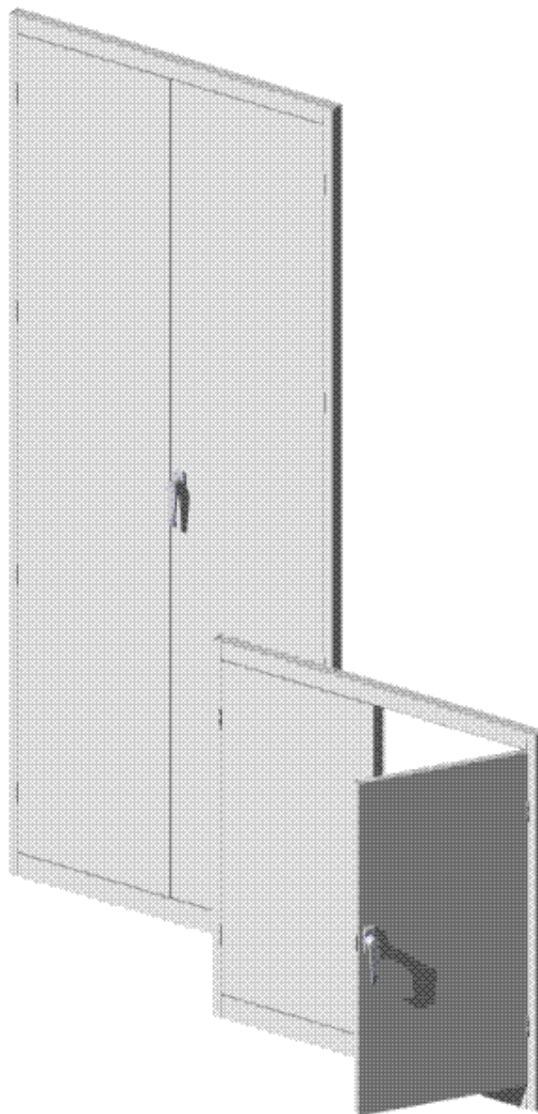

LIMITED WARRANTY

Tennsco warrants goods purchased hereunder to be free of defects in materials and workmanship for a period of one (1) year from the date of shipment, hereunder. This warranty shall not apply in the event goods are damaged as a result of misuse, abuse, neglect, accident, improper application, modification or repair by persons not authorized by Seller, where goods are damaged during shipment, or where the date stamps on the goods have been defaced, modified or removed. UNLESS CONSIDERED UNENFORCEABLE OR UNLAWFUL UNDER APPLICABLE LAW:

- a. ALL IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY EXCLUDED:
- b. BUYERS REMEDY, IF ANY, FOR ANY DEFECTIVE GOODS SHALL BE LIMITED TO A REFUND BY SELLER OR REPLACEMENT OF THE GOODS AT SELLER'S OPTION, AND SHALL IN NO EVENT INCLUDE DAMAGES OF ANY KIND, WHETHER INCIDENTAL, CONSEQUENTIAL OR OTHERWISE.

NO GOODS ACCEPTED FOR RETURN WITHOUT PRIOR APPROVAL. Seller shall have the right to inspect any goods claimed to be defective at Buyers place of business or require Buyer to return the goods to Seller for inspection on Seller's premises. Transportation charges covering returned goods will be borne by Seller only if such goods are proven to be defective, are covered by this warranty and are returned within the warranty period stated above.


TENNSCO CORP., P.O. BOX 1888, DICKSON, TN 37056-1888
(615) 446-8000 (800) 251-8184

INSTALLATION OF HINGED DOOR


Tools Needed: A $\frac{7}{16}$ " nut driver or socket and a flathead screwdriver. Two people required for installation of 87" door.
Approximate assembly time: 10 to 20 minutes.

1. The reference numbers used throughout this sheet refer to the illustration on the back cover. This is to help you to identify the various parts as they are mentioned.


2. Stand the Door/Frame Assembly (Ref. No. 1) in an upright position against the front face of the shelving unit.

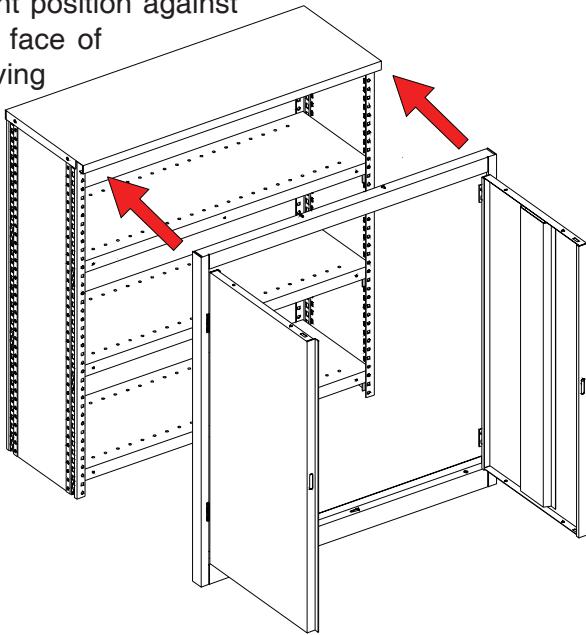


3. With Door/Frame assembly in approximate position, align the angle flanges on the inside of the door frame with the proper holes on the uprights of the shelving unit.

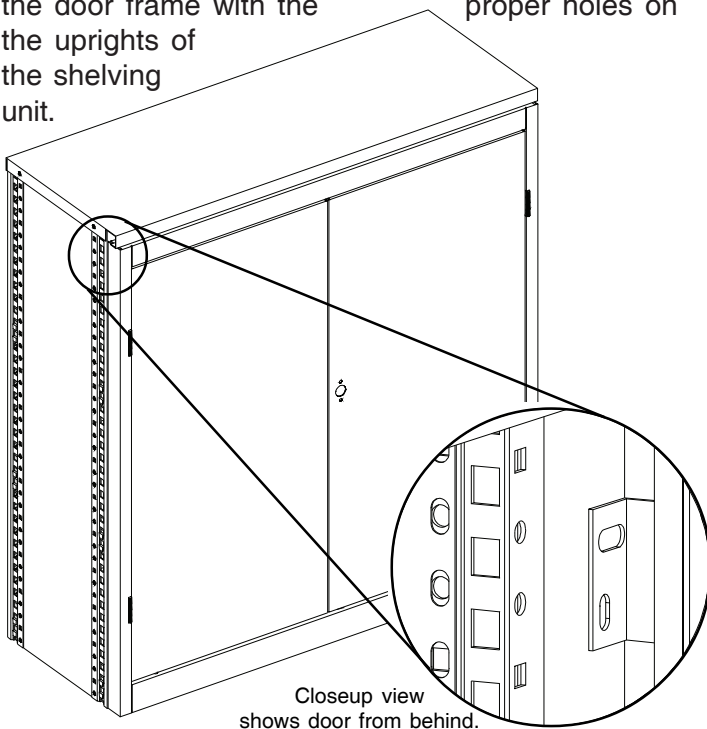


4. Insert one $\frac{1}{4}$ "-20 x $\frac{5}{8}$ " bolt (Ref. No. 2) through each hole and secure with a $\frac{1}{4}$ " x 20 nut.

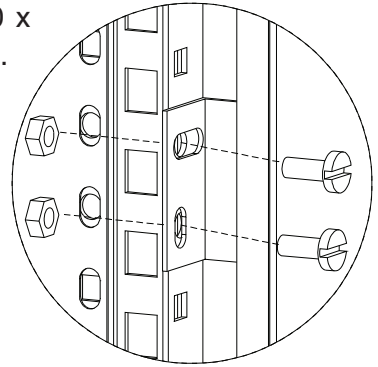

5. Repeat steps 3 and 4 for each angle flange of the door frame. There will be four flanges on the HD-3637 door, and eight flanges on the HD-3687 door.

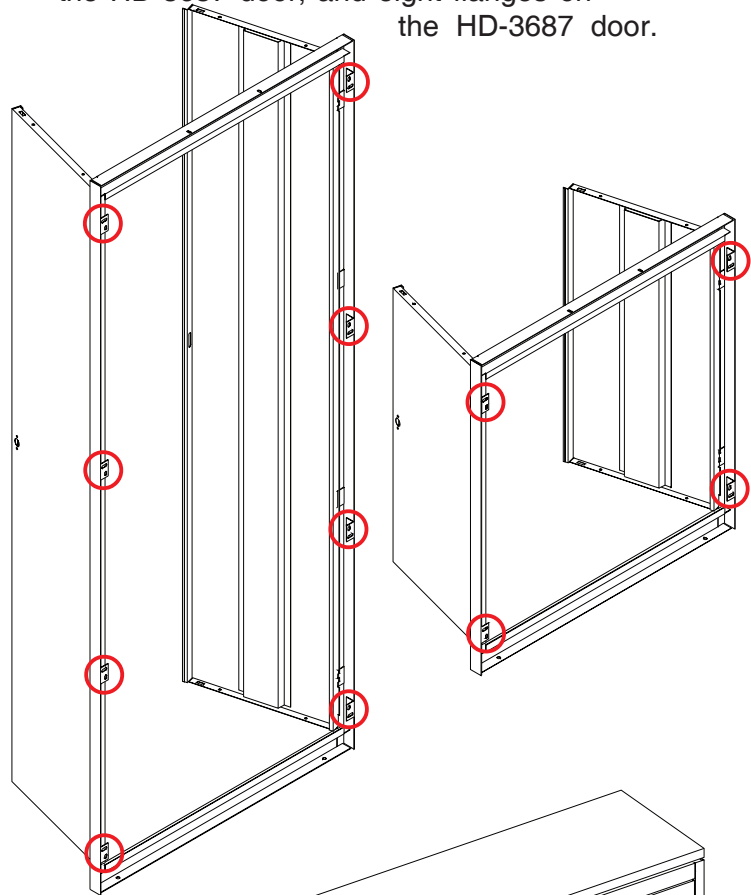


6. Your Q Line Hinged Door is now attached. See next page for instructions on installing the handle and locking system.

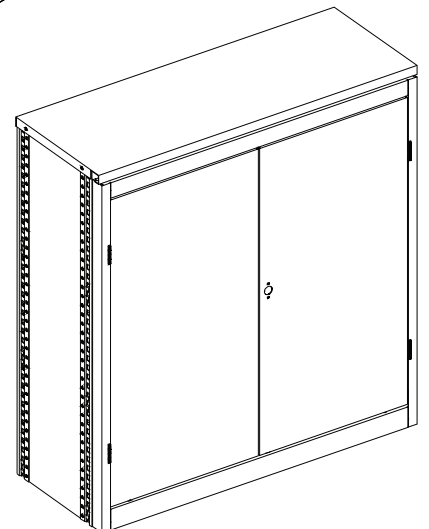


Handle/Locking System Installation Instructions


1. Place locking handle (Ref. No. 3) on right hand door and fasten with two slotted bolts with lockwashers.

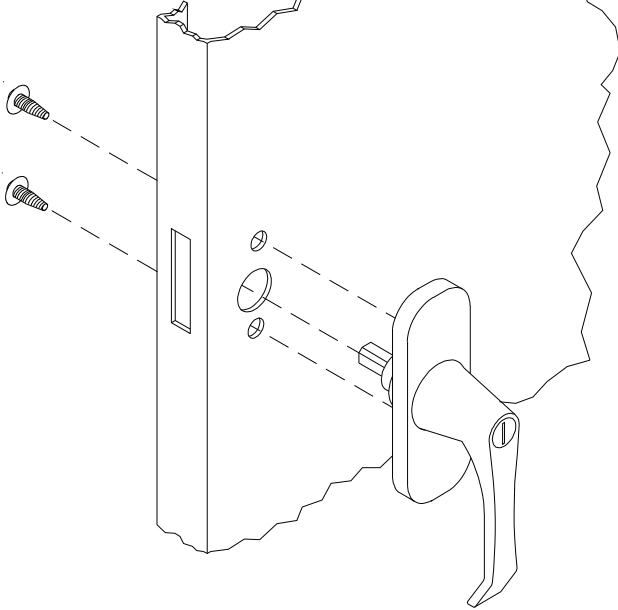


2. Turn handle to open position and place locking cam (Ref. No. 4) over square shank of door handle with latch facing downward.

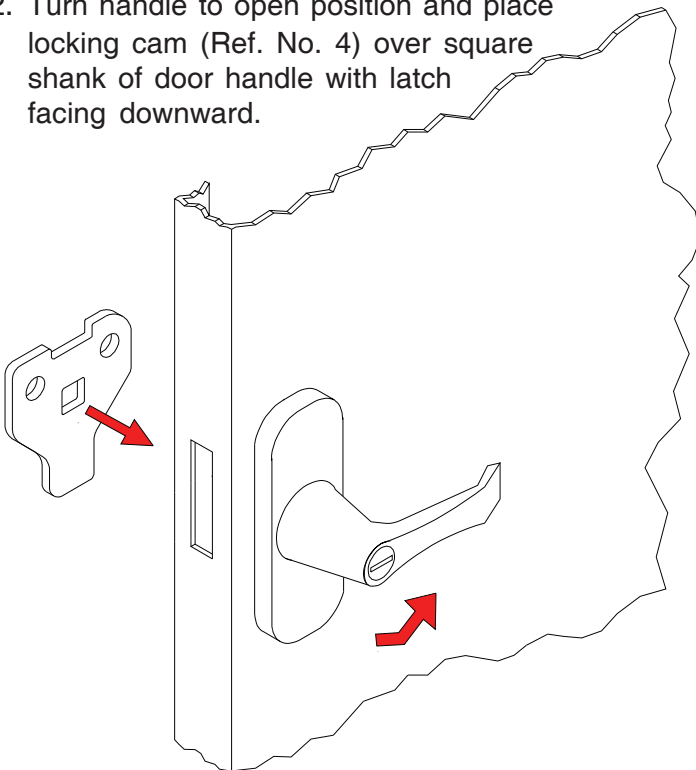


3. With handle still in open position, hook lock bars (Ref. No. 5) to locking cam. Then, hold lock bars in position while sliding nylon lock bar guide inserts (Ref. No. 6) over lock bar ends and through door slots.

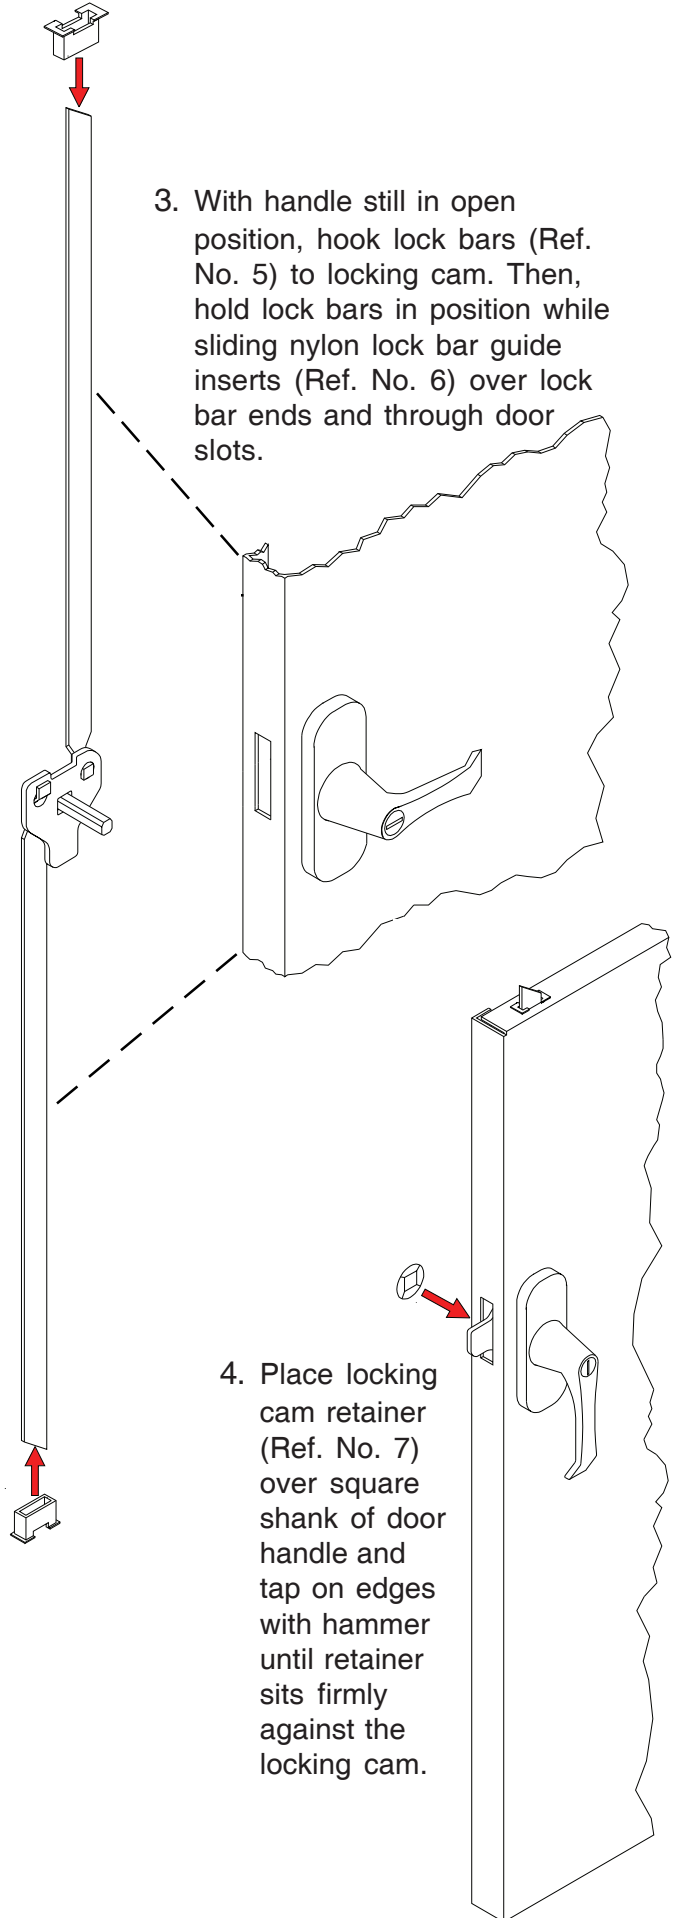

4. Place locking cam retainer (Ref. No. 7) over square shank of door handle and tap on edges with hammer until retainer sits firmly against the locking cam.



REPLACEMENT PARTS

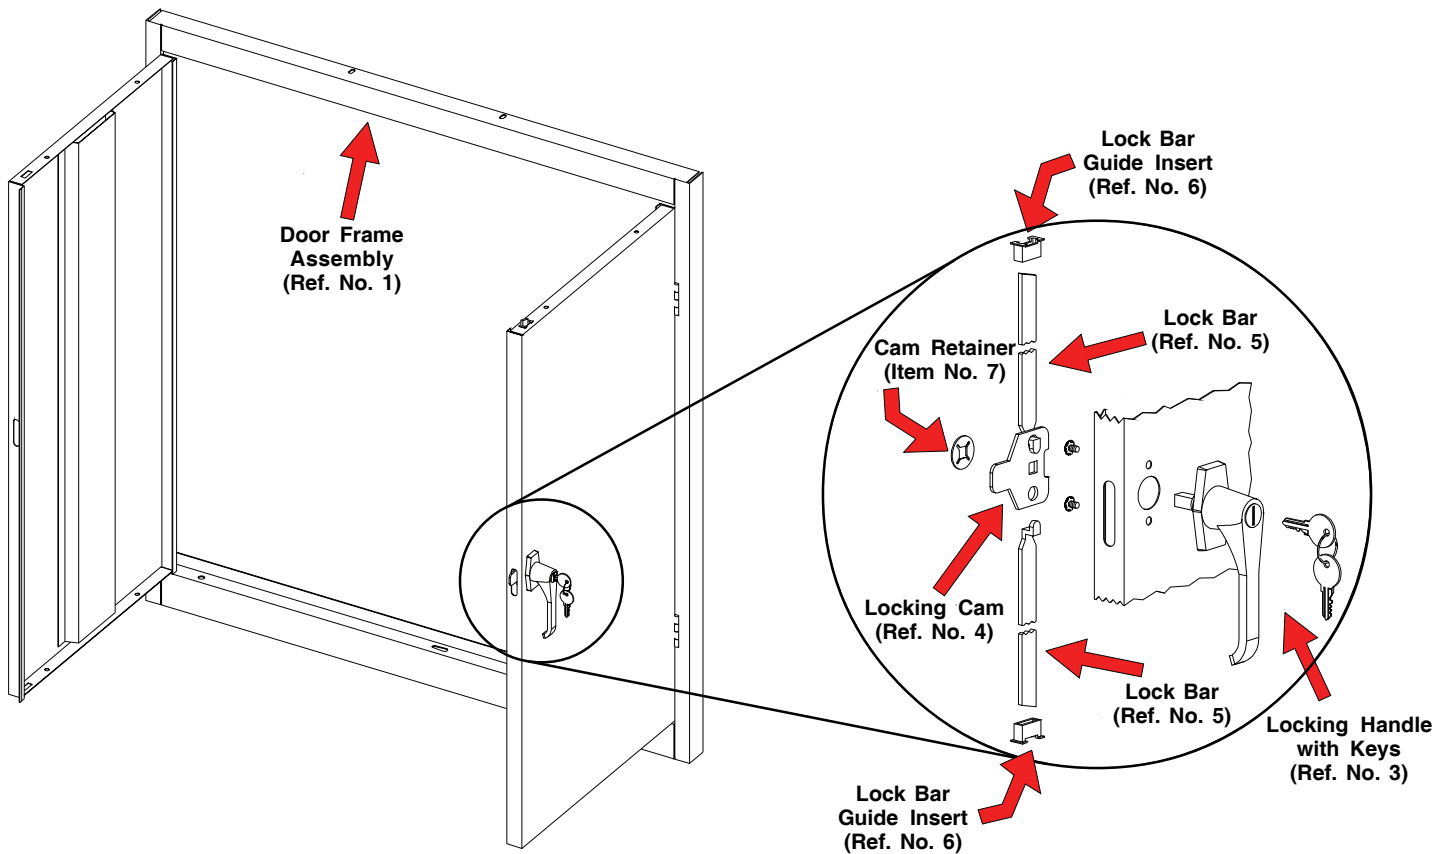

HD-3637				HD-3687			
REF. NO.	DESCRIPTION	QTY.	PART NO.	REF. NO.	DESCRIPTION	QTY.	PART NO.
1	Door/Frame assembly	1	-----	1	Door/Frame assembly	1	-----
2	1/4"-20 x 5/8" bolts & nuts	8	*	2	1/4"-20 x 5/8" bolts & nuts	16	*
3	Locking handle w/keys, hardware	1	944LH	3	Locking handle w/keys, hardware	1	944LH
4	Locking cam	1	944LC	4	Locking cam	1	944LC
5	Lock bar set (2 pieces)	1	055LB	5	Lock bar set (2 pieces)	1	056LB
6	Lock bar guide insert set (2 pieces)	1	944GI	6	Lock bar guide insert set	1	944GI
7	Cam retainer	1	944CR	7	Cam retainer	1	944CR

*1/4"-20 x 5/8" bolts and nuts are standard hardware items, available at your local hardware store.

Tennsco makes every effort to ensure that all units ship complete with all parts and arrive undamaged. However, should your unit contain missing or damaged parts, please contact your purchase location.